


# Yori Surface/ Pendant



Versatile and streamlined, we bring you a new interior lighting range with an array of wattages, finishes, sizes and accessories, for infinite design possibilities.

Yori System:

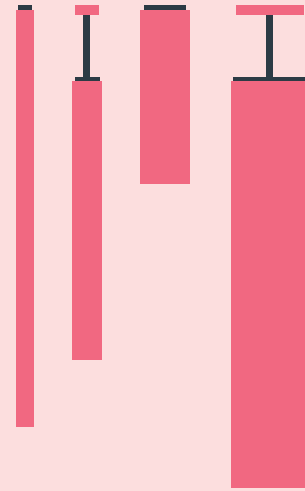




# Yori Surface/Pendant

This versatile new interior illumination range is inspired by the streamlined design of the Yori Track Head System. We have brought together simplicity and excellent technical performance in a wide variety of wattages, finishes, sizes and accessories, enabling you to create a unique lighting solution.


**Available to spec:** 1" (Fall 2016)

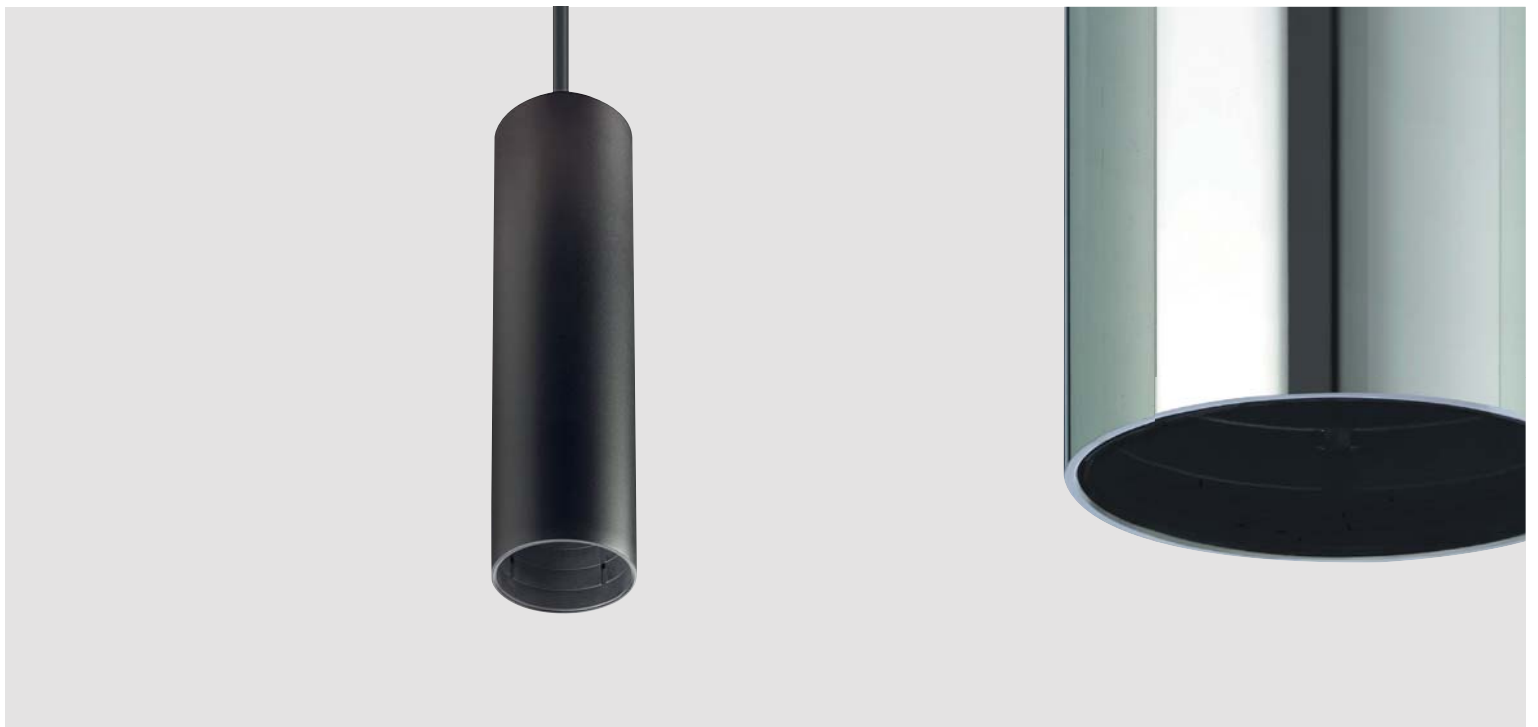


**Finishes:**




**Versions:**



**Optics:**

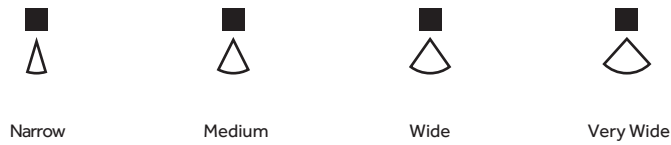

**Yori pendant mounting options:**






**Accessories:**




\*\*Available for version with diameter of 2.4" & 3.7".

### Surface Technical features:




#### Ø 1"

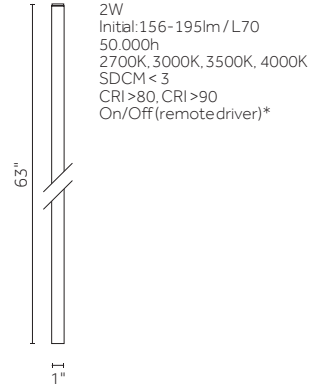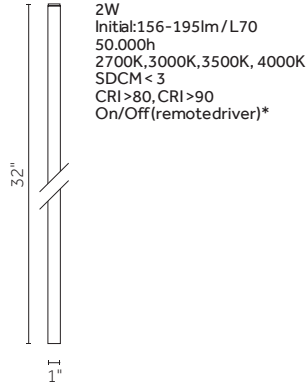




#### Ø 1.5"



#### Ø 2.5"




#### Ø 3.75"



**Pendant technical features:**

**Ø 1"**



2W  
Initial: 156-195lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off (remote driver)\*



2W  
Initial: 156-195lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off (remote driver)\*



2W  
Initial: 156-195lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off (remote driver)\*

**Ø 1.5"**



2W  
Initial: 141-203lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off\*




2W  
Initial: 141-203lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off\*

**Ø 2.5"**



3W  
Initial: 180-197lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off\*



7W  
Initial: 633-907lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off\*



10W  
Initial: 873-1166lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off: 0-10V Dimming,  
Phase-cut \*


Warm Dimming version: 7W,  
Initial: 100-500lm,  
2000K-3000K, CRI > 95  
0-10V Dimming, Phase-cut \*




10W  
Initial: 873-1166lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off: 0-10V Dimming,  
Phase-cut \*

Warm Dimming version: 7W,  
Initial: 100-500lm,  
2000K-3000K, CRI > 95  
0-10V Dimming, Phase-cut \*

**Ø 3.75"**



13W  
Initial: 1148-1661lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off: 0-10V Dimming,  
Phase-cut \*



18W  
Initial: 1631-2355lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off: 0-10V Dimming,  
Phase-cut \*



25W  
Initial: 2337-3205lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off: 0-10V Dimming,  
Phase-cut \*

Warm Dimming version: 25W,  
Initial: 200-2150lm,  
2000K-3000K, CRI > 95  
0-10V Dimming, Phase-cut \*



25W  
Initial: 2337-3205lm / L70  
50,000h  
2700K, 3000K, 3500K, 4000K  
SDCM < 3  
CRI > 80, CRI > 90  
On/Off: 0-10V Dimming,  
Phase-cut \*

Warm Dimming version: 25W,  
Initial: 200-2150lm,  
2000K-3000K, CRI > 95  
0-10V Dimming,  
Phase-cut \*

- Custom length up to 94.5" on request.  
- Watt and lumen data refer to nominal values of the LED source, for photometric data visit [www.reggianiusa.com](http://www.reggianiusa.com).  
- For other color temperatures, please consult factory.  
\* 0-10V Dimming, Phase-cut, please consult factory.

Opal cylinders sizes:




Closed version



Hollow version


Ø 1"




Ø 1.5"



Ø 2.5"



Ø 3.75"





Yori pendant mounting versions: standard j-box canopy, standard j-box mud-in flange for ceiling mount, mini-canopy or direct mount

Different finishes



Four different diameters

\* For other mounting options, please consult factory.